



LGX075

The wax thermostatic element produced by the SMLG with its own patented formula is widely recognized, praised and applied in the industry for its sensitivity and accuracy.

Technical Parameter

| | |
|-----------------------------------|-------------------------|
| Max Working Temperature | 99 °C |
| Starting Response Temperature | 80 °C |
| Maximum Load | 200N |
| Minimum Load | 70N |
| Testing Load | 90N |
| Material | Copper |
| Stroke: $L = 6 \pm 0.5 \text{mm}$ | between 90-99 °C at 90N |
| Lifespan: | 100000 times |



Application

- Boiler system
- HVAC
- Other industries

Customize Solution

If you are not sure about the parameters of thermostatic element, our team will assist you with your selection or customize according to your products' situation. Before any commitment, you need to send us written confirmation for the three performance parameters of the wax thermostatic element (temperature range, working stroke and maximum load).

Dimension

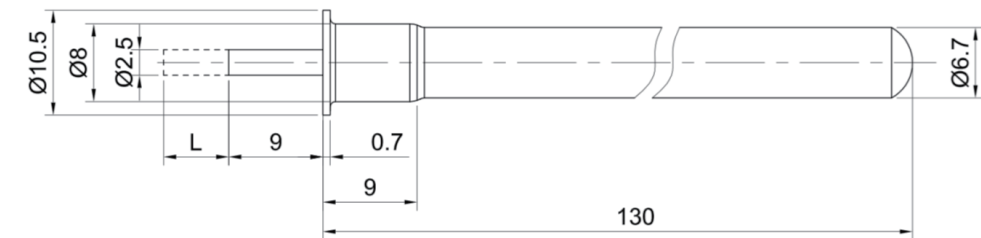

Temperature VS. Stroke

